


## Kayak Ladder Lift & Launch (Model KLL-100)

### MOUNTING LOCATION

Your Kayak Ladder Lift & Launch must be installed on a level/flat surface, and will need 2 inches (2") of clearance between the mounting plate on the launch mount and your seawall, dock or other mounting surface. If your location slopes more than 2" towards the water, you will need to find an alternate mounting location (see Figure A).

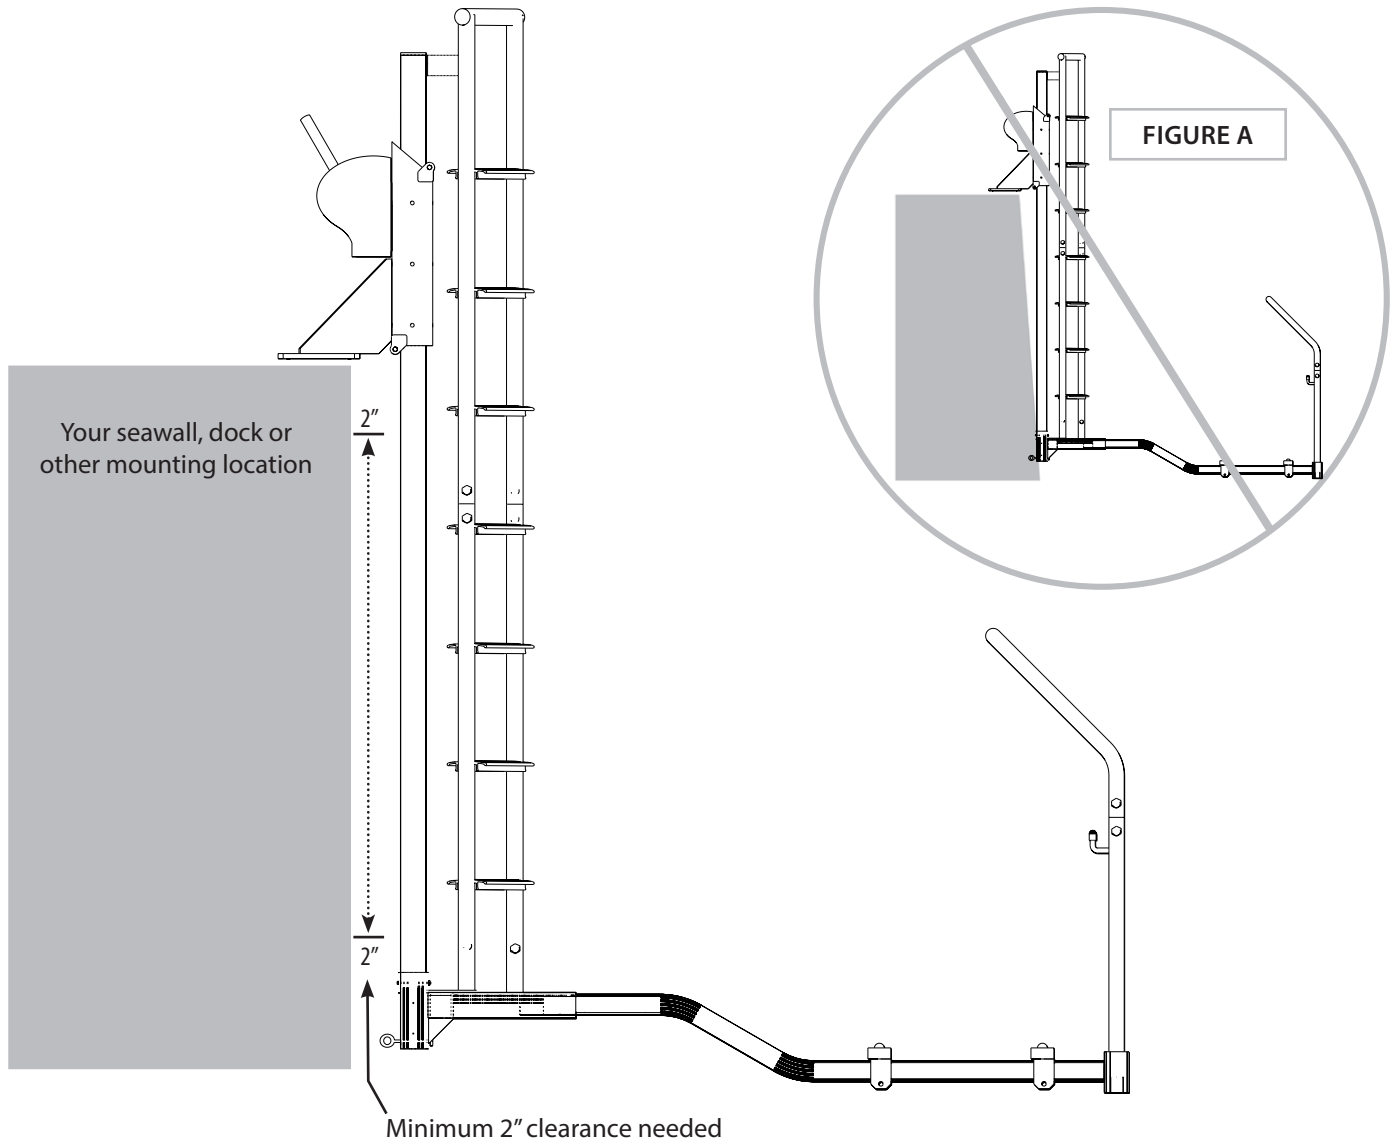

### CAUTION

Based on the design of this product, it is critical that the structure that it attaches to is substantial enough to carry the cantilevered weight of the lift, paddle craft and occupant – there is no support from the ground.



***Do not mount to rotten wood, crumbling concrete or other insecure surface, the lift could fail resulting in potential bodily injury and/or property damage.***